


**GENERAL CHARACTERISTICS**


A flow switch, for liquid or gaseous media, with magnetical actuation of a reed switch.



**I M1 EEx ia I**  
**II 1G EEx ia IIC T4**  
**II 1D EEx iaD 20 T135**




**DIMENSIONS**

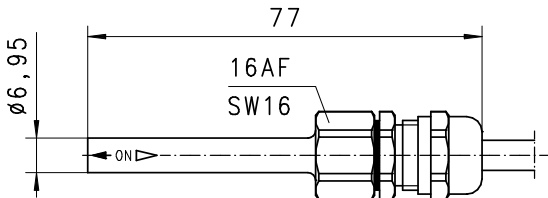

**ELECTRICAL DATA**

reed switch  
cable 1.5 m  
30 V 1 A 50 W  
temperature Tu max. 50°C  
protection class IP 65

wiring 0.225  
n.c. or n.o. depending  
on installation position

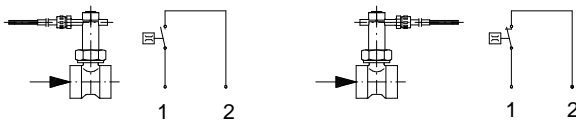

**APPLICATION FOR TYPE**

switch unit	type
A-U1	UR1
	UR2
	NW1



**NOMENCLATURE**

A-U1	-1	basic type specification
A-U1		● switch unit A-U1
	-1	● wiring 0.225 / type UR1/UR2
	-2	● wiring 0.225 / type NW1

All technical changes reserved

●BASIC Standard ○BASIC Programme option □VARIO Special option ⊕ PLUS Accessories ✗ not recommendable